

Lever Lock Butterfly Valve | Grooved / Wafer

Technical Features


- **Connections:** Grooved Ends (AWWA C606) / Wafer Ends (ANSI Class 125)
- **Sizes:** 2", 2-1/2", 3", 4", 6"
- **Maximum Working Pressure:** 300PSI (Max. Test Pressure: 450PSI)
- **Maximum Working Temperature:** 250°F (120°C)
- **Application:** Indoor and Outdoor Use

Component	Material
Body	Ductile Iron, Epoxy Coated
Disc	Ductile Iron, EPDM or NBR Encapsulated
Stem	Stainless Steel
Throttling Plate	Steel, Zinc Plated
Handle	Carbon Steel, Epoxy Coating or Casting



Dimensions: Grooved

Size	L1		W		H1		H2		Weight lbs
	in	mm	in	mm	in	mm	in	mm	
2-1/2"	9.0	228.6	3.8	96.3	5.4	136.9	3.3	84.8	8.5
3"	9.0	228.6	3.8	96.3	5.7	143.8	3.6	91.9	10.0
4"	9.0	228.6	4.5	115.3	7.0	176.8	4.2	107.9	13.5
6"	11.3	285.8	5.2	132.3	8.3	210.8	5.7	144.8	20.0

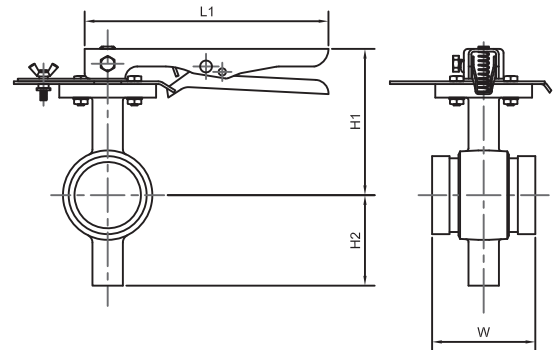

Dimensions: Wafer

Size	L1		W		H1		H2		Weight lbs
	in	mm	in	mm	in	mm	in	mm	
2-1/2"	9.0	228.6	1.8	46.0	6.6	167.9	3.4	86.9	7.5
3"	9.0	228.6	1.8	46.0	6.9	174.8	3.7	93.0	8.0
4"	9.0	228.6	2.0	52.0	7.4	188.0	4.3	109.0	12.0
6"	11.3	285.8	2.2	56.0	8.7	220.0	5.7	143.8	22.5

