


Stainless Steel Adjustable Clevis Hanger Fig. 260SSG

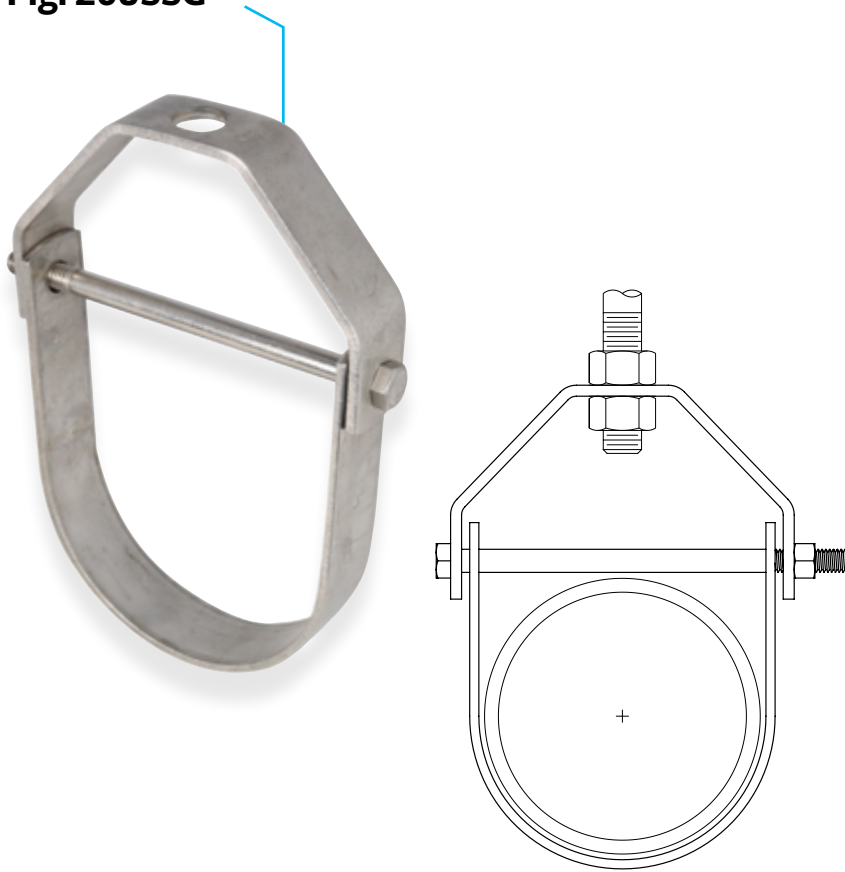

Size Range: 1" through 8" NPS (for larger sizes up to 24" contact ASC Customer Service)

Material: 304 Stainless Steel

Service: For support of stationary steel pipe or conduit.

Maximum Temperature: 650° F

Approvals: MSS SP-58 (Type-1)

Installation: Hanger load nut above clevis must be tightened securely to assure proper hanger performance.

Adjustment: Vertical adjustment without removing pipe may be made from $\frac{3}{8}$ " through $5\text{--}\frac{1}{8}$ ", varying with the size of clevis. Tighten upper nut after adjustment.

Ordering: Pipe size and figure number.

Notes:

- For U.S. domestic product contact ASC Customer Service
- For insulated line options without shields, see Figures 260 ISS and Figure 300.
- For ductile iron pipe sizes, see Figure 590SS.

Caution: When an oversize clevis is used, a pipe spacer or multi-spacer should be placed over clevis bolt to ensure that the lower U-strap will not move in on the bolt.



Fig. 260SSG: Dimensions (in) • Loads (lbs) • Weight (lbs)

Pipe Size	Max Load	Rod Size
1/2	150	3/8
3/4	150	3/8
1	150	3/8
1 1/4	150	3/8
1 1/2	150	3/8
2	150	3/8
2 1/2	150	1/2
3	200	1/2
4	250	5/8
6	480	3/4
8	760	3/4

PROJECT INFORMATION	APPROVAL STAMP
Project:	Approved
Address:	Approved as noted
Contractor:	Not approved
Engineer:	Remarks:
Submittal Date:	
Notes 1:	
Notes 2:	