


Lever Handle Butterfly Valve | Grooved

Technical Features

- **Connections:** Grooved Ends (AWWA C606)
- **Sizes:** 2", 2-1/2", 3", 4", 6"
- **Maximum Working Pressure:** 200PSI (Max. Test Pressure: 350PSI)
- **Maximum Working Temperature:** 250°F (120°C)
- **Application:** Indoor and Outdoor Use

Component	Material
Body	Ductile Iron, Epoxy Coated
Disc	Ductile Iron, EPDM or NBR Encapsulated
Stem	Stainless Steel
Latch Plate	Steel, Zinc Plated
Handle	Carbon Steel, Epoxy Coating or Casting

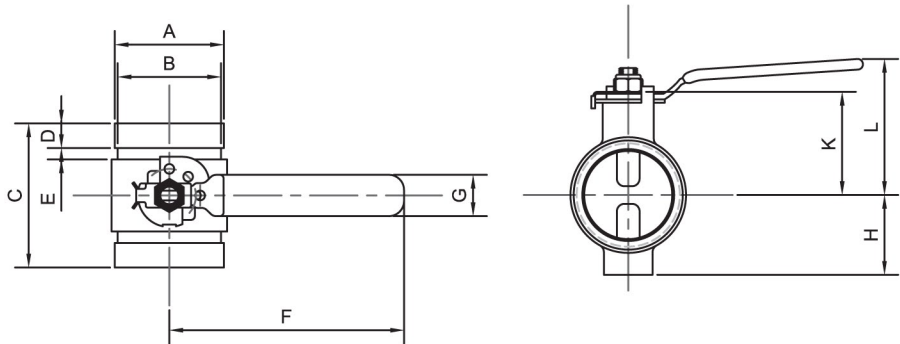

Dimensions:

Size	A		B		C		D		E		F		G		H		K		L		Weight lbs
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	
2"	2.4	60.3	2.3	57.2	3.4	87.4	0.6	15.9	0.3	8.7	6.0	152.4	1.0	25.4	1.8	46.0	2.0	50.8	3.2	81.0	5.0
2-1/2"	2.9	74.2	2.8	70.2	3.8	96.8	0.6	15.9	0.4	8.9	6.0	152.4	1.0	25.4	2.1	52.3	2.4	62.0	3.6	91.9	7.0
3"	3.6	90.3	3.4	86.4	3.8	96.8	0.6	15.9	0.4	8.9	8.4	214.4	1.0	25.4	2.6	66.5	2.7	68.1	4.3	108.0	8.0
4"	4.6	116.1	4.4	111.8	4.6	117.3	0.6	15.9	0.4	8.9	8.4	214.4	1.0	25.4	3.3	84.1	3.3	84.1	4.9	125.5	12.0
6"	6.7	171.0	6.6	166.6	5.3	133.4	0.6	15.9	0.4	8.9	12.3	311.2	1.3	31.8	4.4	111.3	4.4	111.3	7.0	177.8	19.0