


Technical Specifications:

- Forged stainless steel material conforms to ASME A182
- Forged stainless steel flange dimensions conform to ASME B16.5
- NPT threads conform to ASME B1.20.1
- Manufacturing facility is ISO 9001:2008

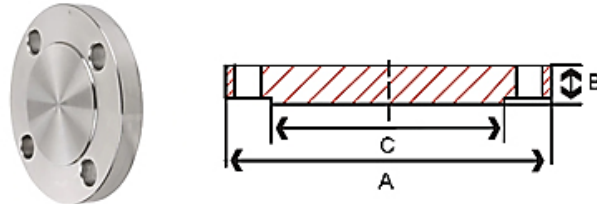

150# Blind Flanges – Stainless Steel 304/304L & 316/316L – Raised Face 1/16"

Size IN	A IN	B IN	C IN	Bolt Circle IN	Bolt Hole Diameter IN	# of Bolt Holes	Weight lbs
1/2	3.50	0.44	1.38	2.38	0.62	4	1
3/4	3.88	0.50	1.69	2.75	0.62	4	2
1	4.25	0.56	2.00	3.12	0.62	4	2
1-1/4	4.62	0.62	2.50	3.50	0.62	4	3
1-1/2	5.00	0.69	2.88	3.88	0.62	4	4
2	6.00	0.75	3.62	4.75	0.75	4	5
2-1/2	7.00	0.88	4.12	5.50	0.75	4	7
3	7.50	0.94	5.00	6.00	0.75	4	9
4	9.00	0.94	6.19	7.50	0.75	8	17
5	10.00	0.94	7.31	8.50	0.88	8	20
6	11.00	1.00	8.50	9.50	0.88	8	26
8	13.50	1.12	10.62	11.75	0.88	8	45
10	16.00	1.19	12.75	14.25	1.00	12	70
12	19.00	1.25	15.00	17.00	1.00	12	110

300# Blind Flanges – Stainless Steel 304/304L & 316/316L – Raised Face 1/16"

Size IN	A IN	B IN	C IN	Bolt Circle IN	Bolt Hole Diameter IN	# of Bolt Holes	Weight lbs
1/2	3.75	0.56	1.38	2.62	0.62	4	2
3/4	4.62	0.62	1.69	3.25	0.75	4	3
1	4.88	0.69	2.00	3.50	0.75	4	3
1-1/4	5.25	0.75	2.50	3.88	0.75	4	4
1-1/2	6.12	0.81	2.88	4.50	0.88	4	6
2	6.50	0.88	3.62	5.00	0.75	4	8
2-1/2	7.50	1.00	4.12	5.88	0.88	4	12
3	8.25	1.12	5.00	6.62	0.88	4	16
4	10.00	1.25	6.19	7.88	0.88	8	27
6	12.50	1.44	8.50	10.62	0.88	8	50
8	15.00	1.62	10.62	13.00	1.00	8	81
10	17.50	1.88	12.75	15.25	1.12	12	124
12	20.50	2.00	15.00	17.75	1.25	12	185

600# Blind (Hi-Hub) Flanges – Stainless Steel 304/304L & 316/316L – Raised Face 1/16"

Size IN	A IN	B IN	C IN	Bolt Circle IN	Bolt Hole Diameter IN	# of Bolt Holes	Weight lbs
1/2	3.75	0.56	1.38	2.62	0.62	4	1
3/4	4.62	0.62	1.69	3.25	0.75	4	2
1	4.88	0.69	2.00	3.50	0.75	4	2
1-1/4	5.25	0.81	2.50	3.88	0.75	4	3
1-1/2	6.12	0.88	2.88	4.50	0.88	4	4
2	6.50	1.00	3.62	5.00	0.75	8	5
3	8.25	1.25	5.00	6.62	0.88	8	9
4	10.00	1.50	6.19	8.50	1.00	8	17
6	12.50	1.88	8.50	11.50	1.12	12	26