



BV14F6N/1000

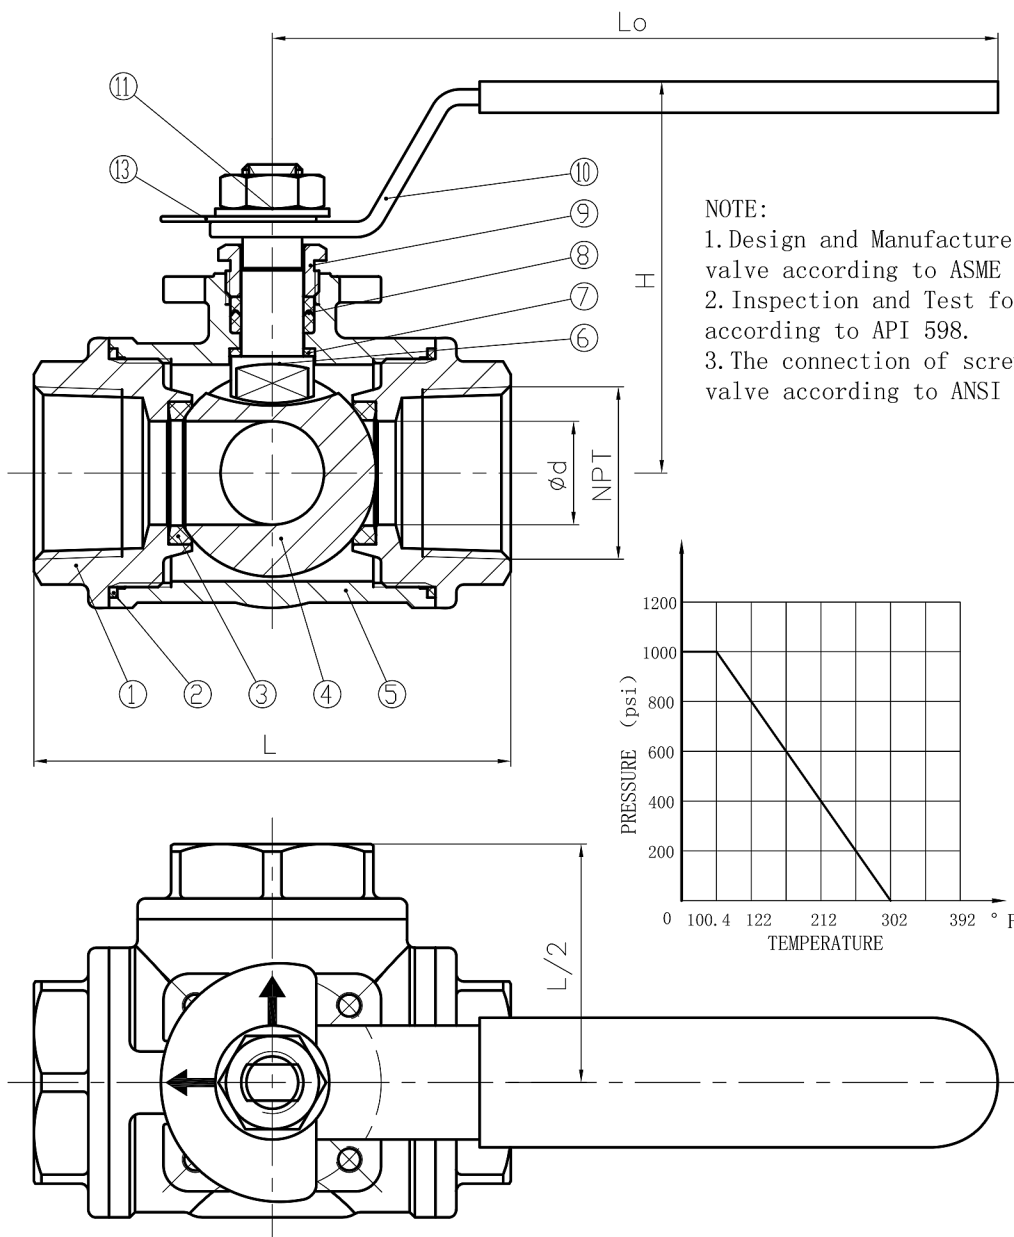

NOTE:
1.Design and Manufacture for valve according to ASME B16.34.
2.Inspection and Test for valve according to API 598.
3.The connection of screwed for valve according to ANSI B1.20.1.

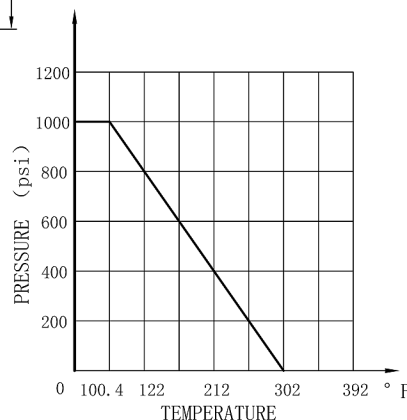

Nominal pressure

1000Psi

Test pressure	Shell test	10.4	Mpa	Test medium	Water	Test temperature	Normal temperature
	Seal test	7.6			Air		
	Gas seal test	0.6					
Applicable medium			Water,Oil,Gas				
Applicable temperature			-20~302°F				

NPS	L	d	NPT	Lo	H	Weight(lb)
1/4"	2.795	0.394	1/4"	3.937	2.244	1.146
3/8"	2.795	0.394	3/8"	3.937	2.244	1.102
1/2"	2.913	0.472	1/2"	4.331	2.303	1.268
3/4"	3.465	0.591	3/4"	4.724	2.362	1.962
1"	3.622	0.787	1"	5.512	2.835	2.646
1 1/4"	4.882	0.984	1 1/4"	5.512	3.228	5.137
1 1/2"	5.433	1.260	1 1/2"	7.087	3.740	7.871
2"	6.063	1.496	2"	7.874	3.937	9.921

13	INDICATOR BOARD		1	304	
12	NUT		1	A194 8	
11	WASHER		1	304	
10	HANDLE		1	STAINLESS STEEL	
9	GLAND		1	304	
8	PACKING		1	PTFE	
7	STEM WASHER		1	PTFE	
6	STEM		1	A276 316	
5	BODY		1	A351 CF8M	
4	BALL		1	SS316	
3	SEAT		4	PTFE	
2	GASKET		3	PTFE	
1	BONNET		3	A351 CF8M	
NO.	DESCRIPTION		Q' TY	MATERIAL	

				BFO				BuyFittingsOnline.com	
								3 Way L Port Ball Valve 1000PSI, NPT	
MARK	BEFORE MODIFIED	AFTER MODIFIED	DATE						
DRA.		APP.					SCALE	BV14F6N/1000	
CHK.		DATE							