


## FEMALE TEE

### 4002 – FEMALE x FEMALE x FEMALE NPT

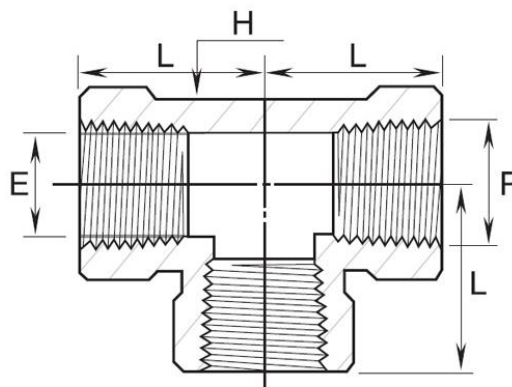

**End Connection:** Female NPT x Female NPT x Female NPT  
**Series:** Standard High Pressure Instrumentation Threaded Fittings

Part Number	P NPT in.	L mm	E mm	Wrench Flat mm	Pressure Rating psi (bar)	
					SS316, C.Steel	Brass
<b>4002-M</b>	1/8	24.1	8.9	12.7	6200 (437)	3100 (213)
<b>4002-N</b>	1/4	29.0	11.7	17.5	7200 (496)	3600 (248)
<b>4002-O</b>	3/8	34.5	15.0	20.6	5600 (385)	2800 (192)
<b>4002-P</b>	1/2	37.0	18.7	25.4	5600 (385)	2800 (192)
<b>4002-Q</b>	3/4	46.5	23.5	31.8	5100 (351)	2500 (172)
<b>4002-R</b>	1	48.8	29.7	42.9	6400 (440)	3200 (220)

\*\*All dimensions are in millimeters unless otherwise specified, for reference only and subject to change.



## Instrumentation Pipe & Weld Fittings

### Specifications & Pressure Ratings

- Wrench flat body design allowing standard hex wrench assembly
- Attractive finishes to suit precision equipment.
- Much less-weight design compared to Class 3000 pipe fittings.
- Fine pipe thread construction equals or exceeds the requirement of ASME B1.20.1 to ensure maximum thread engagement.
- Male pipe threads capped for protection from damages.
- Fitting materials available in SS316, Brass and Carbon Steel.
- These Standard Rating Fittings are designed to the requirements of ASME B31.3 process piping code.
- These pipe thread sizes are available 1/8 in. to 1 in. NPT