


HOLLOW HEX PLUGS

4057 – MALE NPT

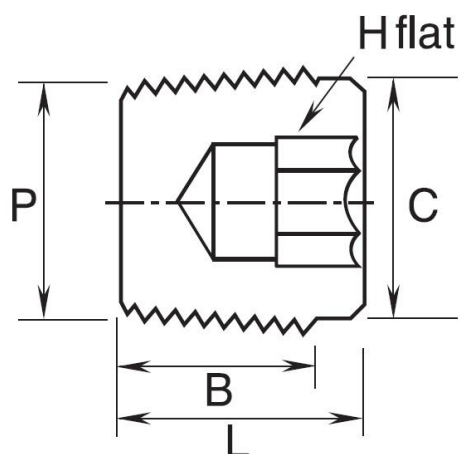

End Connection: Male NPT Threaded

Series: Standard High Pressure Instrumentation Threaded Fittings

Part Number	P NPT in.	L mm	B mm	C mm	H mm	Pressure Rating psig (bar)
4057-M	1/8	10.4	7.4	9.4	4.76	10000 (689)
4057-N	1/4	15.5	12.4	12.1	6.35	8100 (558)
4057-O	3/8	15.0	11.9	15.7	7.93	7600 (524)
4057-P	1/2	19.3	16.2	19.3	9.52	7500 (517)

**All dimensions are in millimeters unless otherwise specified, for reference only and subject to change.



PDF Spec Sheet Includes the following:

- Threaded Fittings Standard Pressure Ratings
 - Material Standards and Temperature Ratings
 - Temperature De-Rating Factors
 - Temperature Ratings of O-Ring, Gasket Materials
 - Pipe Thread Designators
-

Features of Threaded Fittings:

- Wrench flat body design allowing standard hex wrench assembly
- Attractive finishes to suit precision equipment.
- Much less-weight design compared to Class 3000 pipe fittings.
- Fine pipe thread construction equals or exceeds the requirement of ASME B1.20.1 to ensure maximum thread engagement.
- Male pipe threads capped for protection from damages.
- Fitting materials available in SS316, Brass and Carbon Steel.
- These Standard Rating Fittings are designed to the requirements of ASME B31.3 process piping code.
- These pipe thread sizes are available 1/8 in. to 1 in. NPT