


PIPE PLUG

4028 – MALE NPT

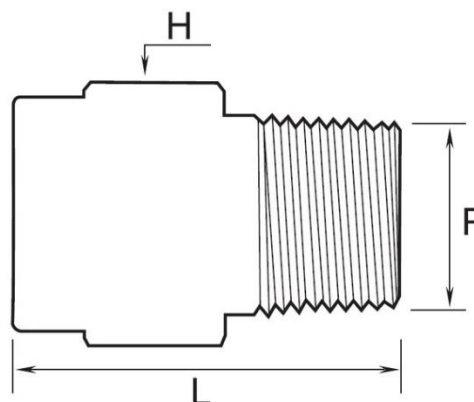

End Connection: Male NPT Threaded

Series: Standard High Pressure Instrumentation Threaded Fittings

Part Number	P NPT in.	L mm	H Hex mm	Pressure Rating psig (bar)
4025-M	1/8	19.05	11.1	10,000 (689)
4025-N	1/4	24.1	14.2	8,100 (558)
4025-O	3/8	25	17.4	7,600 (524)
4025-P	1/2	30.5	22.2	7,500 (517)
4025-Q	3/4	30.5	26.9	7,200 (496)
4025-R	1	38.1	34.9	5,300 (365)

**All dimensions are in millimeters unless otherwise specified, for reference only and subject to change.



Instrumentation Pipe & Weld Fittings Specifications & Pressure Ratings

PDF Spec Sheet Includes the following:

- **Threaded Fittings Standard Pressure Ratings**
 - **Material Standards and Temperature Ratings**
 - **Temperature De-Rating Factors**
 - **Temperature Ratings of O-Ring, Gasket Materials**
 - **Pipe Thread Designators**
-

Features of Threaded Fittings:

- Wrench flat body design allowing standard hex wrench assembly
- Attractive finishes to suit precision equipment.
- Much less-weight design compared to Class 3000 pipe fittings.
- Fine pipe thread construction equals or exceeds the requirement of ASME B1.20.1 to ensure maximum thread engagement.
- Male pipe threads capped for protection from damages.
- Fitting materials available in SS316, Brass and Carbon Steel.
- These Standard Rating Fittings are designed to the requirements of ASME B31.3 process piping code.
- These pipe thread sizes are available 1/8 in. to 1 in. NPT