

Stainless Steel Hose Nipple Adapters (AKA King Nipples)

Hose Barb x NPT Threaded - 150#

Straight and Reducing Sizes Listed Below

Specifications:

Use with air, water, oil, natural gas, steam

NPT and FNPT threads conform to ASME B1.20.1

Maximum Pressure:

300 psi @ 72 F, 150 psi @ 366 F for steam

Maximum Steam Pressure: 150 psi


Stainless castings conform to ASTM A351 ACI Grade CF8 (304) & ACI Grade CF8M (316)

Heavy Pattern 150# Threaded Fittings - Cast

Manufacturing facility is ISO 9001:2008

Dimensions are for reference only*

Quality guarantee on all pipe fittings

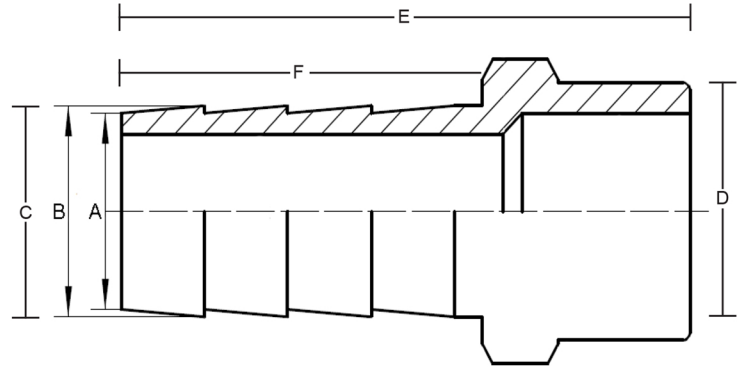

Part #	Description	A	B	C	D	E	F	Hex
73951	1/4 HOSE BARB X MIP 304SS ADAPT	0.30	0.34	0.190	0.340	1.640	0.870	0.600
73952	3/8 HOSE BARB X MIP 304SS ADAPT	0.37	0.41	0.250	0.420	1.890	1.000	0.750
73953	1/2 HOSE BARB X MIP 304SS ADAPT	0.54	0.59	0.390	0.520	2.370	1.420	0.910
73954	3/4 HOSE BARB X MIP 304SS ADAPT	0.75	0.81	0.580	0.740	2.580	1.500	1.150
73955	1 HOSE BARB X MIP 304SS ADAPTER	0.98	1.06	0.780	0.960	2.950	1.770	1.420
73956	1-1/4 HOSE BARB X MIP 304SS ADPT	1.27	1.33	1.070	1.300	3.320	2.300	1.780
73957	1-1/2 HOSE BARB X MIP 304SS ADPT	1.52	1.59	1.300	1.530	3.480	2.180	2.010
73958	2 HOSE BARB X MIP 304SS ADAPTER	1.98	2.06	1.760	2.030	3.850	2.400	2.500
73961	4 HOSE BARB X MIP 304SS ADAPTER	3.98	4.07	3.770	4.060	4.710	2.720	4.640
73970	1/4 X 1/8 HB X MIP 304SS ADAPTER	0.30	0.34	0.210	0.210	1.500	0.870	0.470
73971	3/8 X 1/4 HB X MIP 304SS ADAPTER	0.37	0.41	0.250	0.330	1.780	1.060	0.590
73972	1/2 X 3/8 HB X MIP 304SS ADAPTER	0.54	0.59	0.380	0.440	2.160	1.320	0.720
73973	1/2 X 1/4 HB X MIP 304SS ADAPTER	0.54	0.59	0.360	0.270	2.010	1.230	0.680
73974	3/4 X 1/2 HB X MIP 304SS ADAPTER	0.75	0.81	0.590	0.580	2.540	1.580	0.900
73975	1 X 3/4 HB X MIP 304SS ADAPTER	0.98	1.06	0.780	0.780	2.770	1.030	1.640
73976	1 X 1/2 HB X MIP 304SS ADAPTER	0.98	1.06					
73977	1-1/4 X 1 HB X MIP 304SS ADAPTER	1.27	1.33	1.090	1.010	3.140	1.980	1.410
73979	1-1/2 X 1-1/4 HB X MIP 304SS ADP	1.52	1.59	1.320	1.370	3.450	2.180	1.750
73980	1-1/2 X 1 HB X MIP 304SS ADAPTER	1.52	1.59	1.300	1.030	3.300	2.090	1.700
73981	2 X 1-1/2 HB X MIP 304SS ADAPTER	1.98	2.06					
73982	2 X 1-1/4 HB X MIP 304SS ADAPTER	1.98	2.06	1.710	1.230	3.880	2.500	2.070
973951	1/4 HOSE BARB X MIP 316SS ADAPT	0.30	0.34	0.190	0.330	1.630	0.880	0.600
973952	3/8 HOSE BARB X MIP 316SS ADAPT	0.37	0.41	0.250	0.430	1.890	1.000	0.740
973953	1/2 HOSE BARB X MIP 316SS ADAPT	0.54	0.59	0.380	0.510	2.370	1.410	0.890
973954	3/4 HOSE BARB X MIP 316SS ADAPT	0.75	0.81	0.580	0.740	2.580	1.500	1.150
973955	1 HOSE BARB X MIP 316SS ADAPTER	0.98	1.06	0.770	0.950	2.970	1.770	1.430
973956	1-1/4 HOSE BARB X MIP 316SS ADPT	1.27	1.33	1.090	1.290	3.340	2.030	1.780
973957	1-1/2 HOSE BARB X MIP 316SS ADPT	1.52	1.59	1.310	1.540	3.500	2.190	2.000
973958	2 HOSE BARB X MIP 316SS ADAPTER	1.98	2.06	1.750	2.000	3.910	2.410	2.490
973991	4 HOSE BARB X MIP 316SS ADAPTER	3.98	4.07	3.770	4.060	4.710	2.720	4.640

Dimensions are for reference only. If you require close tolerances or specific dimensions - we recommend a custom machined solution. Contact us for pricing and lead times. 304 and 316 dimensions are the same.



BUY FITTINGS ONLINE

BuyFittingsOnline.com

| 1-800-569-0810

| bfo@qmctechnologies.com